


Message summaries

Connecting the diagnostic device

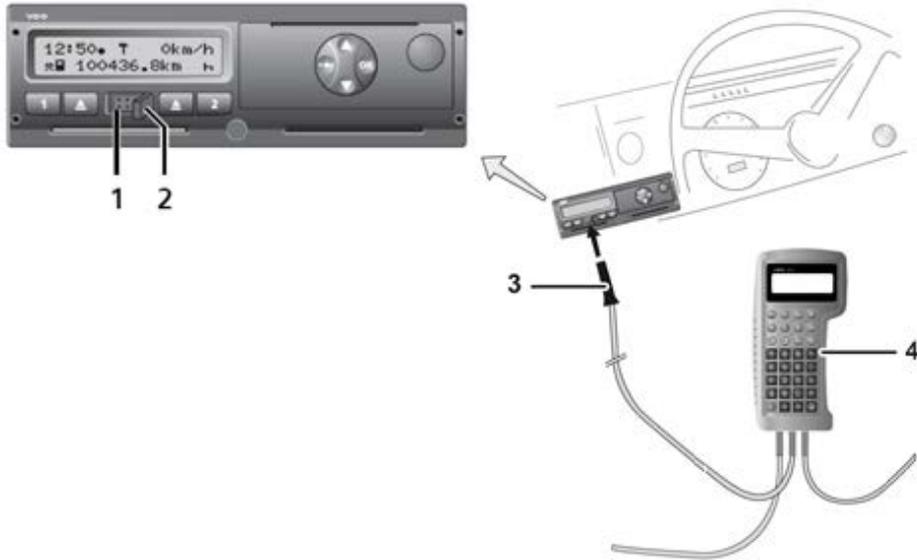

To connect the diagnostic device to the DTCO 1381:

1. Open the cover (2) on the calibration interface (1) by tilting it to the right.
2. Connect the CTCII (4) to the DTCO 1381 calibration interface using the DTCO diagnostic cable (3).

Message summaries

001 – Internal fault

DTCO screen display:

```
xA internal
fault          01
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **001** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	Meaning: A general, serious device fault has occurred. Action: If the error message continues to be displayed despite having acknowledged it repeatedly, replace the DTCO 1381.	This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.

Message summaries

002 – Internal fault

DTCO screen display:

```
xA internal
fault          02
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1 Consecutive number
- 2 Position in error memory
- 3 Number of errors
- 4 Symbol for **error is active**

! **Important**
Stands for error memory code **002** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: A general, serious device fault has occurred.</p> <p>Action: If the error message continues to be displayed despite having acknowledged it repeatedly, replace the DTCO 1381.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>

Message summaries

004 – Internal fault

DTCO screen display:

```
xA internal
fault          04
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **004** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Fault warning message	Meaning: A general, serious device fault has occurred.
-----------------------	--

	Action: Replace the DTCO 1381.
--	--

	Remarks: This warning message is not saved in the mass memory and is never reset.
--	---

Message summaries

005 – Internal fault

DTCO screen display:

```
xA internal
fault          05
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **005** that can be read out using a CTCII.


No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: A general, serious device fault has occurred.</p> <p>Action: If the error message continues to be displayed despite having acknowledged it repeatedly, replace the DTCO 1381.</p>	<p>This warning message is displayed every hour until the cause is removed.</p> <p>This warning message is not stored in the mass memory in Calibration mode.</p>


Message summaries

006 – Time fault

DTCO screen display:



Example – CTCII display:

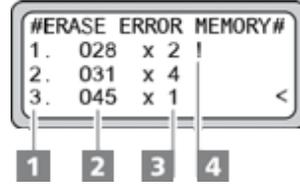

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**


 **Important**
Stands for error memory code **006** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: The DTCO 1381's time setting is not correct.</p> <p>Possible cause(s): The clock has stopped or gone wrong. An internal, periodic check has detected that the time is not plausible.</p> <p>Action: Check the DTCO 1381's UTC time and correct it using a test device if necessary. Check the DTCO 1381's Clock function. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p> <p>Remarks: While this error is active, driver or company cards are not accepted to avoid data inconsistency.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>


Message summaries

007 – Security breach

DTCO screen display:



Example – CTCII display:

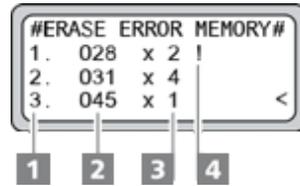

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **007** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Display fault (possibly no display).</p> <p>Possible cause(s): Data transfer to the display controller is interrupted. Display is defective.</p> <p>Action: If the error message continues to be displayed, replace the DTCO 1381.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>

Message summaries

009 – Calibration fault

DTCO screen display:

```
xA calibration
fault          09
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **009** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Calibration memory fault.</p> <p>Possible cause(s): An internal, periodic check of significant calibration parameters has detected a checksum error.</p> <p>Summary of significant calibration parameters: Vehicle identification number Vehicle registration number Characteristic coefficient (W value) Recording equipment constant (K value) Effective wheel circumference (L value) Tyre size Maximum speed UTC time Odometer reading Calibration date</p> <p>Maßnahme(n): If the error message continues to be displayed despite having acknowledged it repeatedly, replace the DTCO 1381.</p>	<p>This warning message is displayed every hour until the cause is removed.</p> <p>This warning message is not stored in the mass memory in Calibration mode.</p>

Message summaries

010 – Internal fault

DTCO screen display:

```
4A internal      10
fault
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **010** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Fault warning message	<p>Meaning: v pulse output (B7) fault.</p> <p>Possible cause(s): The connection cable between the DTCO 1381 and the connected control unit is defective. The control unit connected to output B7 is defective. Output B7 on the DTCO 1381 is defective.</p> <p>Action: Check whether or not the connected control unit carries out active cable monitoring and deactivate if necessary. Check output B7 on the DTCO 1381, deactivate B7 monitoring if necessary. Test the connection cable between the DTCO 1381 and the connected control unit. Earth short circuit? + U_B short circuit?</p> <p>Check connected control unit (input). Replace any defective components if necessary.</p> <p>Remarks: The monitoring of this fault depends on the DTCO 1381's configuration: The monitoring of this fault can be activated or deactivated (B7recognise).</p>


Message summaries

012 – Download fault

DTCO screen display:



Example – CTCII display:

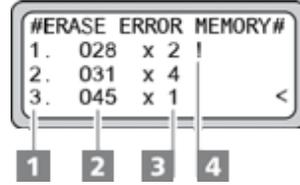

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**

 **Important**
Stands for error memory code **012** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: A communication fault has occurred when downloading card or mass memory data.</p> <p>Action: Repeat the download procedure. Check the connection cable between the download device and the plug (bad connection, loose contact, connector assignment). Check the download interface on the DTCO 1381. Check the download device. Replace any defective components if necessary.</p>	This warning message is not stored in the mass memory in Calibration mode.

Message summaries

013 – Internal fault

DTCO screen display:

```
xA internal
fault          13
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **013** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Other CAN fault, CAN controller message, e.g. no subscriber, no acknowledgement etc.</p> <p>Possible cause(s): On board electrical system</p> <p>Action: Check and if necessary correct the DTCO 1381 function or configuration. Check the power supply (terminals 30, 15 and 31) of the CAN subscriber. Check the earth connection at PIN A5 / A6 Check whether the timing behaviour on the CAN subscribers at terminal 15 is ON or OFF. Test the BUS medium, if necessary using a CAN analysis tool.</p> <p>Remarks: The monitoring of this fault depends on the DTCO 1381's configuration: The monitoring of this fault can be activated or deactivated (CANEVCfg). The fault can be inhibited for a period of time after ignition ON (ErrorManagement-InitialisationInhibit).</p> <p>The DTCO 1381 does not have to be the cause of the error.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode. This error message only applies for CAN1.</p>

Message summaries

014 – Internal fault

DTCO screen display:

```
xA internal
fault          14
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **014** that can be read out using a CTCII.


No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Other CAN fault. CAN controller status message Bus off.</p> <p>Possible cause(s): Fault in the bus medium Fault in the physical layer Protocol error</p> <p>Action: Check and if necessary correct the DTCO 1381 function or configuration. Test the bus medium, if necessary using a CAN analysis tool. Check the power supply (terminals 30, 15 and 31) of the CAN subscriber. Check the earth connection at pin A5 / A6 Check whether the timing behaviour on the CAN subscribers at terminal 15 is ON or OFF. Check the wiring and the plug allocation. Check whether a load resistor is missing. Check whether any CAN subscribers on the bus have a different baud rate. Check the bit structure.</p> <p>Remarks: The monitoring of this fault depends on the DTCO 1381's configuration: The monitoring of this fault can be activated or deactivated (CANEVCfg). The fault can be inhibited for a period of time after ignition on (ErrorManagement-InitialisationInhibit).</p> <p>The DTCO 1381 does not have to be the cause of the error.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode. This error message only applies for CAN1.</p>


Message summaries

015 – Internal fault

DTCO screen display:



Example – CTCII display:

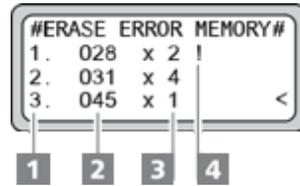

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **015** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Fault or break in communication with an external display unit (reset monitoring).</p> <p>Possible cause(s): Instrument cluster or Electronic Speedometer.</p> <p>Action: Check and if necessary correct the DTCO 1381 function or configuration. Test the connection cable between the DTCO 1381 and the connected display unit. Connector assignment Connection Specifications</p> <p>Check that the display unit is working properly, e.g. resend reset message. Check whether the DTCO 1381 is working properly. Check the DTCO 1381's calibration data (version / configuration). Replace any defective components if necessary.</p> <p>Remarks: The monitoring of this fault depends on the DTCO 1381's configuration: The monitoring of this fault can be activated or deactivated (CANVCfg). The fault can be inhibited for a period of time after ignition ON (ErrorManagement-InitialisationInhibit).</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode. This error message only applies for CAN1.</p>


Message summaries

016 – Sensor fault

DTCO screen display:



Example – CTCII display:

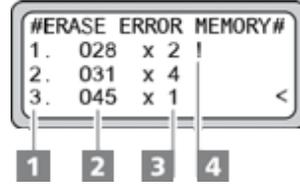

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**


 **Important**
Stands for error memory code **016** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: The KITAS2+ 2171 motion sensor reports an internal fault after Calibration mode. the self-test.</p> <p>Action: Check the KITAS2+ 2171. Replace the KITAS2+ 2171 if necessary.</p>	This warning message is not stored in the mass memory in


Message summaries

017 – Security breach

DTCO screen display:



Example – CTCII display:

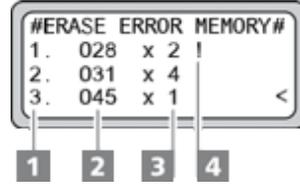

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **017** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	Meaning: Internal sensor error; the motion sensor reports a data integrity error. Action: Check the KITAS2+ 2171. Replace the KITAS2+ 2171 if necessary.	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----  
!@ 0 05.06.2011 07:03  
! 22 ( 0) 00h15  
@----  
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
!@ 05.06.2011 08:03  
! 22 00h15  
@ U /VS SW 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
!@ 0 05.06.2011 08:03  
! 22 ( 0) 00h15  
@ @ /DF000012323455 6 8  
-----
```


A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

018 – Security breach

DTCO screen display:



Example – CTCII display:

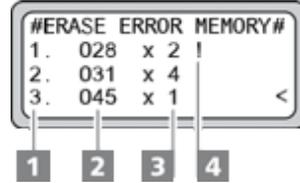

Use the and keys to scroll through the error memory:

- 1 Consecutive number
- 2 Position in error memory
- 3 Number of errors
- 4 Symbol for **error is active**

! **Important**
Stands for error memory code **018** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Internal sensor error; the motion sensor reports a data integrity error.</p> <p>Action: Check the KITAS2+ 2171. Pair the KITAS2+ 2171 with the DTCO 1381 using a test device. Replace the KITAS2+ 2171 if necessary.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----  
!@ 0 05.06.2011 07:03  
! (21) ( 0) 00h15  
@---
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
!@ 05.06.2011 08:03  
! (21) 00h15  
@ D /VS SV 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
!@ 0 05.06.2011 08:03  
! (21) ( 0) 00h15  
@ D /DF000012323455 6 8  
-----
```


A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

019 – Power interruption

DTCO screen display:



Example – CTCII display:

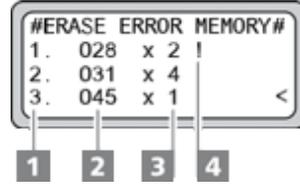

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **019** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Event warning message	<p>Meaning: The motion sensor's power supply was interrupted.</p> <p>Action: Check the KITAS2+ 2171 sensor cable and if necessary correct: Connector assignment Connection (loose connection) Specifications</p> <p>Check voltage behaviour on terminals 30 and 15 during start up. Are the values within the specified range? Check the KITAS2+ 2171. Check the DTCO 1381. Replace any defective components if necessary.</p>	<p>This warning message is not stored in the mass memory in Calibration mode.</p>


Message summaries

020 – Sensor fault

DTCO screen display:



Example – CTCII display:

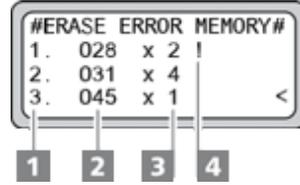

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**

 **Important**
Stands for error memory code **020** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Event warning message	<p>Meaning: Error in sensor communication.</p> <p>Possible cause(s): No data signal (B4). KITAS2+ 2171 not paired with the DTCO 1381.</p> <p>Action: Check the KITAS2+ 2171 sensor cable and if necessary correct: Connector assignment Connection (loose connection) Specifications</p> <p>Check the KITAS2+ 2171. Check the DTCO 1381 (input B4). Pair the KITAS2+ 2171 with the DTCO 1381 using a test device. Replace any defective components if necessary.</p>	<p>This warning message is displayed every hour until the cause is removed. The event is only monitored after the DTCO 1381 has been activated.</p>


Message summaries

021 – Sensor fault

DTCO screen display:



Example – CTCII display:

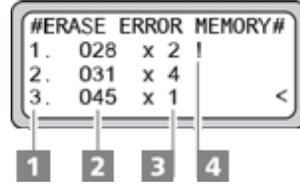

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **021** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Event warning message	<p>Meaning: Error in sensor communication.</p> <p>Possible cause(s): No real-time signal.</p> <p>Action: Check the KITAS2+ 2171 sensor cable and if necessary correct: Connector assignment Connection (loose connection) Specifications</p> <p>Check the KITAS2+ 2171. Check the DTCO 1381 (input B4). Replace any defective components if necessary.</p>	<p>This warning message is displayed every hour until the cause is removed. The event is only monitored after the DTCO 1381 has been activated.</p>


Message summaries

022 – Sensor fault

DTCO screen display:



Example – CTCII display:

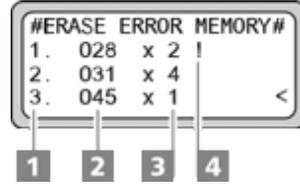

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **022** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Event warning message	<p>Meaning: Error in sensor communication.</p> <p>Possible cause(s): Difference in motion sensor pulses Transmission error</p> <p>Action: Check the KITAS2+ 2171 sensor cable and if necessary correct: Connector assignment Connection (loose connection) Specifications.</p> <p>Check the KITAS2+ 2171. Check the DTCO 1381. Replace any defective components if necessary.</p>	<p>This warning message is displayed every hour until the cause is removed. The event is only monitored after the DTCO 1381 has been activated.</p>


Message summaries

023 – Security breach

DTCO screen display:



Example – CTCII display:

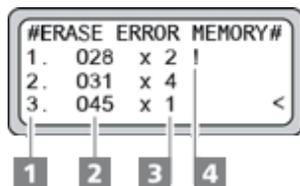

Use the and keys to scroll through the error memory:

- 1 Consecutive number
- 2 Position in error memory
- 3 Number of errors
- 4 Symbol for **error is active**



Important

Stands for error memory code **023** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Error when authenticating the motion sensor when it is operating or error in the pairing procedure.</p> <p>Possible cause(s): Error when authenticating the motion sensor when it is operating. Transmission error. Repeated coupling with the KITAS2+ 2171. After coupling 3 times, this function is disabled for security reasons. The workshop card must be removed and re-inserted, i.e. it must be authenticated again.</p> <p>Action: Eject the workshop card, insert it again and repeat the coupling procedure. Check the KITAS2+ 2171 sensor cable. Check the KITAS2+ 2171. Check the DTCO 1381 (input B4). Pair the KITAS2+ 2171 with the DTCO 1381 using a test device. Replace any defective components if necessary.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode. The event is only monitored after the DTCO 1381 has been activated.</p>

Printout vehicle > event:



```
-----  
!@ 0 05.06.2011 07:03  
! 11 ( 0) 00h15  
@---
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
!@ 05.06.2011 08:03  
! 11 00h15  
@ D /WS SV 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
!@ 0 05.06.2011 08:03  
! 11 ( 0) 00h15  
@ D /DF000012323455 6 8  
-----
```

A security breach occurred while a card was inserted.


Explanation of error information on the printouts:

Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

024 – Security breach

DTCO screen display:



Example – CTCII display:

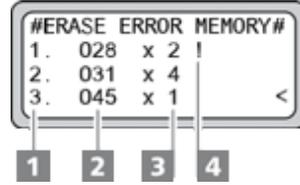

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **024** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Unknown serial number. Error when comparing the motion sensor's serial number.</p> <p>Action: Check whether the KITAS2+ 2171 is sealed on the gearbox. Check the KITAS2+ 2171. Check the DTCO 1381. Pair the KITAS2+ 2171 with the DTCO 1381 using a test device. Replace any defective components if necessary.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode. The event is only monitored after the DTCO 1381 has been activated.</p>

Printout vehicle > event:



```
-----  
!@ 0 05.06.2011 07:03  
! 13 ( 0) 00h15  
@---
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
!@ 05.06.2011 08:03  
! 13 00h15  
@ D /VS SW 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
!@ 0 05.06.2011 08:03  
! 13 ( 0) 00h15  
@ D /DF000012323455 6 8  
-----
```

A security breach occurred while a card was inserted.


Explanation of error information on the printouts:

Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

025 – Security breach

DTCO screen display:



Example – CTCII display:

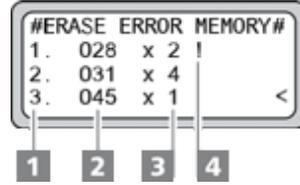

Use the and keys to scroll through the error memory:

- 1 Consecutive number
- 2 Position in error memory
- 3 Number of errors
- 4 Symbol for **error is active**

! **Important**
Stands for error memory code **025** that can be read out using a CTCII.
No workshop card necessary. ◀


Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Data memory error. Because of a DTCO 1381 data memory error data security is no longer guaranteed.</p> <p>Action: Check the DTCO 1381 (test drive). If the error message continues to be displayed, replace the DTCO 1381.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>

Printout vehicle > event:




A security breach occurred while no card was inserted.

Printout driver > event:

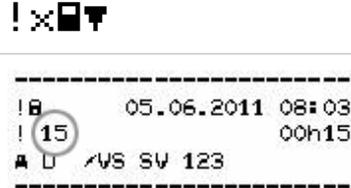

A security breach occurred while no card was inserted.




A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

026 – Security breach

DTCO screen display:



Example – CTCII display:

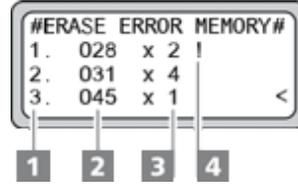

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **026** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Security breach. The DTCO 1381 housing has been opened or is open.</p> <p>Action: Check the seals on the DTCO 1381 (housing). Check the DTCO 1381. If the error message continues to be displayed, replace the DTCO 1381.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



Printout driver > event:



```
-----
!@ 0 05.06.2011 07:03
! 17 ( 0) 00h15
@---
```

A security breach occurred while no card was inserted.

```
-----
!@ 05.06.2011 08:03
! 17 00h15
A D /VS SW 123
-----
```

A security breach occurred while no card was inserted.

```
-----
!@ 0 05.06.2011 08:03
! 17 ( 0) 00h15
@DF000012323455 6 8
-----
```

A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.

Message summaries

028 – Driving without card

DTCO screen display:

```
!e driving  
without card 28
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <  
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **028** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message **Meaning:**

Trip without a card or without a valid driver or workshop card in card slot 1 or trip with an invalid card combination in card slots 1 and 2.

Action:

Check whether there is a valid driver or workshop card in card slot 1 or 2. If necessary insert a valid card.
Check whether a company or control card is in card slot 1. Eject the card if necessary.


Message summaries

029 – Card conflict

DTCO screen display:



Example – CTCII display:

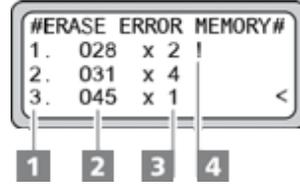

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **029** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message

Meaning:
Invalid card combination in card slots 1 and 2.
The two tachograph cards must not be inserted at the same time.

Action:
Check the combination of the inserted tachograph cards.

Also see Section 2 in the DTCO 1381 Technical Product Manual.


Message summaries

030 – Overspeed

DTCO screen display:



Example – CTCII display:

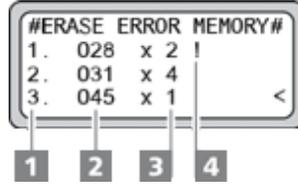

Use the  and  keys to scroll through the error memory:

-  1 Consecutive number
-  2 Position in error memory
-  3 Number of errors
-  4 Symbol for **error is active**

 **Important**
Stands for error memory code **030** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message	<p>Meaning: The programmed maximum speed (Vset) was exceeded for more than 60 seconds.</p> <p>Action: Reduce speed.</p>
-----------------------	---


Message summaries

031 – Power interruption

DTCO screen display:



Example – CTCII display:

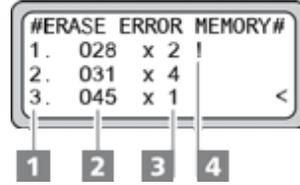

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **031** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Event warning message	<p>Meaning: The DTCO 1381's operating voltage was outside the specified range.</p> <p>Possible cause(s): Overvoltage. Power interruption</p> <p>Power interruption If the DTCO 1381's power supply falls below the following critical specified range value, the DTCO 1381 recognises a "power interruption": 12 V version: type 7.5 V (min. 7.4 V; max. 8.0 V) 24 V version: type 8.1 V (min. 8.0 V; max. 8.7 V)</p> <p>If the DTCO 1381's power supply rises above the following critical value again, the DTCO 1381 displays "power interruption": 12 V version: type 8.4 V (min. 8.2 V; max. 9.0 V) 24 V version: type 9.0 V (min. 8.9 V; max. 9.6 V)</p> <p>Action: Check the DTCO 1381's power supply and if necessary correct: Check the connection plug and cable (connector assignment, loose contact, bad connection). Is the voltage value on terminals 30 and 15 within the specified range? Voltage behaviour on terminals 30 and 15 during start up. Are the values within the specified range?</p> <p>Check whether the DTCO 1381 is working properly. Replace any defective components if necessary.</p>	<p>This warning message is not stored in the mass memory in Calibration mode.</p>

Message summaries

034 – Ejection not possible

DTCO screen display:

4 ejection not possible 34

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <  
1 2 3 4
```

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **034** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: A tachograph card cannot be ejected. The request is rejected.</p> <p>Possible cause(s): The vehicle is moving. Data download is running. Ignition is off (only ADR version). The tachograph card is being read or written. The tachograph card is requested at the same time as the tachograph card has been read correctly (after insertion or after restarting during activation).</p> <p>Action: Check whether the DTCO 1381 detects Trip. If necessary stop the vehicle and repeat the procedure. Check whether data is currently being downloaded. If necessary repeat the procedure after the download has finished. Check whether the ignition is on. If necessary turn the ignition on (only ADR version). Repeat the procedure. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>

Message summaries

036 – Printout not possible

DTCO screen display:

```
⏏ printout not  
possible 36
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **036** that can be read out using a CTCII.

No workshop card necessary.


Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: It is currently not possible to print out or display the required data or a printout that is running has been cancelled.</p> <p>Possible cause(s): The vehicle is moving. Ignition is off (necessary with ADR version). The print head has overheated. Undervoltage or overvoltage. Internal printer interface is occupied with another active procedure, e.g. is currently printing.</p> <p>Action: Repeat the procedure. It is only possible to print out or display data when the vehicle is stationary and the ignition is turned on (only ADR version). If necessary stop the vehicle or turn the ignition on. After printing a large amount of data, the print head temperature is too high. Wait until it has cooled down. Check the DTCO 1381's power supply and if necessary correct: Check the connection plug and cable (connector assignment, loose contact, bad connection). Is the voltage value on terminals 30 and 15 within the specified range? Voltage behaviour on terminals 30 and 15 during start up. Are the values within the specified range?</p> <p>Wait until the active procedure has finished and the internal printer interface is free again. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>


Message summaries

037 – Printout delayed

DTCO screen display:



Example – CTCII display:

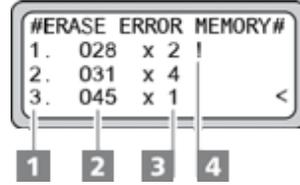

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **037** that can be read out using a CTCII.
No workshop card necessary.
Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: It is currently not possible to print out or display the required data or a printout that is running has been cancelled.</p> <p>Possible cause(s): The print head has overheated.</p> <p>Action: After printing a large amount of data, the print head temperature is too high. Wait until it has cooled down. When the cause has been removed, the interrupted or delayed printout procedure is resumed automatically. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>


Message summaries

038 – Drawer open

DTCO screen display:



Example – CTCII display:

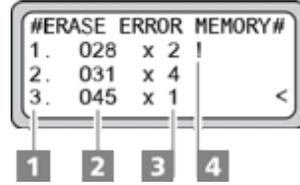

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**



Important

Stands for error memory code **038** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: With one of the following situations the unit detects that the printer drawer is open: Prompt for a tachograph card in card slot 2. Prompt for a printout. During a printout.</p> <p>The tachograph card output is delayed until the printer drawer is closed. A current printout is cancelled, a print request is rejected.</p> <p>Possible cause(s): Printer drawer is open.</p> <p>Action: Check whether the printer drawer is open and if necessary close it. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>


Message summaries

039 – No paper

DTCO screen display:



Example – CTCII display:

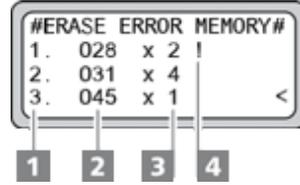

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **039** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: During a printout or when a print is requested the unit detects that there is no paper in the printer. The current printout is interrupted and the part that has already been printed is automatically selected or the print request is rejected.</p> <p>Possible cause(s): No printer paper inserted. Printer paper has run out.</p> <p>Action: Check whether the printer drawer is open and if necessary close it.</p> <p>If a new printer paper roll is inserted within one hour, the DTCO 1381 automatically continues with the printout. A message is output in the first two lines of the following printout (line 1: printout start time; line 2: counter of the consecutive printouts).</p> <p>If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>

Message summaries

040 – Internal fault (slot 1)

DTCO screen display:

```
040 internal
fault          40
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **040** that can be read out using a CTCII.


No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Card mechanical system fault (slot 1, driver 1).</p> <p>Possible cause(s): Card lock not closed General card mechanical system fault</p> <p>Action: Insert the tachograph card again. Request the tachograph card again. Interrupt constant voltage supply (i.e. restart). If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p> <p>Remarks: The inserted tachograph card may be ejected. This fault is reset after a tachograph card has been inserted correctly.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>


Message summaries

041 – Card fault (slot 1)

DTCO screen display:



Example – CTCII display:

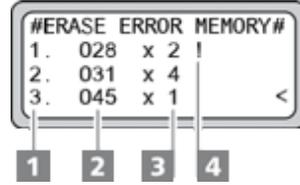

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **041** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Fault warning message	<p>Meaning: Communication error with inserted tachograph card in slot 1 (driver 1). A communication error occurred while the card data was being read or written.</p> <p>Possible cause(s): The tachograph card contacts are soiled. The workshop card is faulty. The card slot contacts are soiled.</p> <p>Action: Check the tachograph card's contact points. Check and clean the tachograph card. Check the DTCO 1381, clean the card slot's contact points if necessary. Replace any defective components if necessary.</p> <p>Remarks: The inserted tachograph card is ejected.</p>


Message summaries

042 – Security breach (slot 1)

DTCO screen display:



Example – CTCII display:

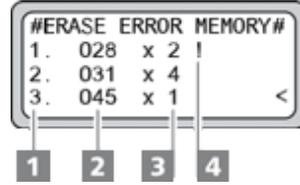

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
 Stands for error memory code **042** that can be read out using a CTCII.
 No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: The authenticity of the data on the card in slot 1 (driver 1) is not guaranteed.</p> <p>Possible cause(s): Error when checking data authenticity.</p> <p>Action: Check the tachograph card.</p> <p>Remarks: Tachograph card is ejected.</p>	This warning message is not stored in the mass memory in Calibration mode .

Printout vehicle > event:



```
-----
! 0 05.06.2011 07:03
! 14 ( 0) 00h15
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----
! 0 05.06.2011 08:03
! 14 ( 0) 00h15
A 0 /WS SV 123
-----
```

A security breach occurred while no card was inserted.

```
-----
! 0 05.06.2011 08:03
! 14 ( 0) 00h15
@ 00 /DF000012323455 6 8
-----
```


A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
 Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

043 – Security breach (slot 1)

DTCO screen display:



Example – CTCII display:

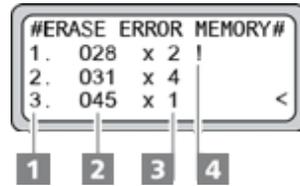

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **043** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Missing card (slot 1, driver 1). The DTCO 1381 no longer detects an inserted card.</p> <p>Possible cause(s): After a power cut, the identity check detects that a previously inserted card is missing or another card has been inserted. A card is inserted and the card mechanical system's locking device is not locked.</p> <p>Action: Check whether the tachograph card is inserted correctly. Eject the tachograph card and insert it again. Check whether the card locking device is functioning correctly. If the error message continues to be displayed, replace the DTCO 1381.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----
! 0 05.06.2011 07:03
! 18 ( 0) 00h15
! 18
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----
! 0 05.06.2011 08:03
! 18 ( 0) 00h15
! 18 /VS SW 123
-----
```

A security breach occurred while no card was inserted.

```
-----
! 0 05.06.2011 08:03
! 18 ( 0) 00h15
! 18 /DF000012323455 6 8
-----
```

A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.

Message summaries

044 – Card not closed (slot 1)

DTCO screen display:

```
!QA1 card not
closed          44
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **044** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message	Meaning:
-----------------------	-----------------

When reading in a driver or workshop card (in card slot 1), the unit detects that the card was not removed correctly from the last vehicle or the data is not correctly stored.

Action:

- Check the tachograph card.
- Check the previous EC recording equipment.


Remarks:

The source of the error is not in the current DTCO 1381.


Message summaries

045 – Time overlap (slot 1)

DTCO screen display:



Example – CTCII display:

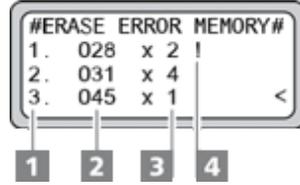

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **045** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message	<p>Meaning: Negative time difference between this and the last vehicle (slot 1: driver card) (EC recording equipment).</p> <p>Possible cause(s): The removal time stored on the card is later than the current system time (= time the card was inserted into the current DTCO 1381), i.e. the time of the current EC recording equipment is slow compared with the time on the previous EC recording equipment.</p> <p>Action: Check the DTCO 1381's UTC time and correct it using a test device if necessary. Check the UTC time on the previous EC recording equipment. Correct it using a test device if necessary.</p>
-----------------------	--

Message summaries

046 – Insertion while driving (slot 1)

DTCO screen display:

```
!01 insertion  
while drivine 46
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <  
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **046** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Event warning message	<p>Meaning: A tachograph card has been inserted in slot 1 (driver 1) after the start of the trip.</p> <p>Possible cause(s): Motion sensor pulse detected before the tachograph card was read correctly.</p> <p>Action: Normally only insert tachograph cards when the vehicle is stationary. No further action is necessary.</p>


Message summaries

047 – Security breach (slot 1)

DTCO screen display:



Example – CTCII display:

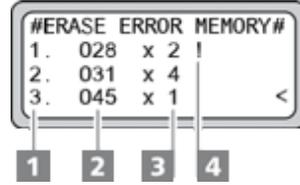

Use the and keys to scroll through the error memory:

- Consecutive number
- Position in error memory
- Number of errors
- Symbol for **error is active**

! **Important**
Stands for error memory code **047** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Security breach when authenticating a tachograph card in slot 1 (driver).</p> <p>Possible cause(s): Error when checking tachograph card identity.</p> <p>Action: Check the tachograph card. Check the workshop card, enter the correct PIN.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



Printout driver > event:



```
-----  
! 0 05.06.2011 07:03  
! 12 ( 0) 00h15  
!-----
```

A security breach occurred while no card was inserted.

```
-----  
! 0 05.06.2011 08:03  
! 12 00h15  
! D /VS SW 123  
!-----
```

A security breach occurred while no card was inserted.

```
-----  
! 0 05.06.2011 08:03  
! 12 ( 0) 00h15  
! DF000012323455 6 8  
!-----
```


A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

048 – Card not valid (slot 1)

DTCO screen display:



Example – CTCII display:

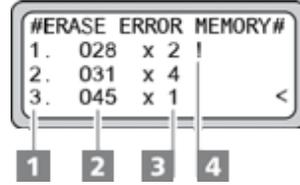

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **048** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message **Meaning:**

The tachograph card inserted in slot 1 (driver 1) has expired or is invalid.

Possible cause(s):

An invalid or expired tachograph card **a)** has been inserted.

When the day changes **b)** the unit detects that an inserted tachograph card is no longer valid.

Action:

Check the tachograph card for validity.

Remarks:

a) You can only insert an expired tachograph card (tachograph card has expired but the certificate is still valid) to print out or display the stored data; after confirming the warning message the tachograph card is read as **read only**.

b) If the day changes when the vehicle is stationary, the corresponding data on the tachograph card is stored and the card is ejected. If the day changes during the trip, the corresponding data on the tachograph card is stored when the trip ends and the card is ejected.

Message summaries

049 – Recording inconsistent (slot 1)

DTCO screen display:

```
40?1 recording  
inconsistent 49
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **007** that can be read out using a CTCII.

No workshop card necessary.


Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: When reading in a tachograph card inserted in slot 1 (driver 1), the unit detects that there is an inconsistency in the links within the day's data.</p> <p>Action: Check the tachograph card. Analyse data structure.</p>


Message summaries

050 – Card error (slot 1)

DTCO screen display:



Example – CTCII display:

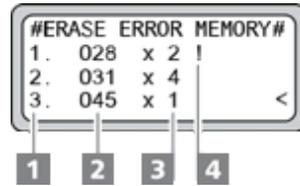

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **050** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message

Description

Operation message

Meaning:

The tachograph card inserted in slot 1 (driver 1) was not detected or cannot be read or written.

Possible cause(s):

- Card inserted incorrectly.
- The tachograph card contacts are soiled.
- Card is faulty.
- The card slot contacts are soiled.

Action:

- Check whether it is a valid tachograph card.
- Check whether the tachograph card has been inserted correctly. If necessary insert it correctly.
- Check the card contacts, clean if necessary.
- Check the tachograph card.
- Check whether another tachograph card can be read correctly.
- Clean the card slot contacts.


Message summaries

051 – Wrong card type (slot 1)

DTCO screen display:



Example – CTCII display:

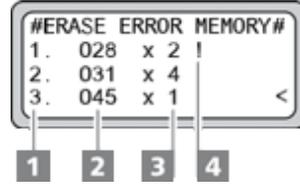

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**



Important

Stands for error memory code **051** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: The card inserted in slot 1 (driver 1) is not a tachograph card.</p> <p>Possible cause(s): The card is not a valid tachograph card. The tachograph card contacts are soiled. Card is faulty. The card slot contacts are soiled.</p> <p>Action: Check whether it is a valid tachograph card. Check whether the tachograph card has been inserted correctly. If necessary insert it correctly. Check the card contacts, clean if necessary. Check the tachograph card. Clean the card slot contacts.</p>


Message summaries

052 – Card locked (slot 1)

DTCO screen display:



Example – CTCII display:

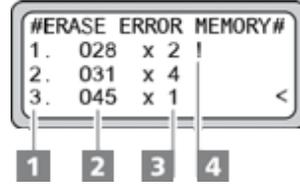

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **052** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message

Description

Operation message

Meaning:

The workshop card inserted in slot 1 (driver 1) is blocked.

Possible cause(s):

The workshop card is blocked because the PIN has been entered wrongly 5 times.
Workshop card is faulty.

Action:

Check the workshop card.
Insert a valid (not blocked) workshop card.

Message summaries

053 – Internal fault (slot 1)

DTCO screen display:

```
4A internal
fault          53
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **053** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: Procedure not possible. The tachograph card in slot 1 (driver 1) is not accepted and is ejected again.</p> <p>Possible cause(s): The DTCO 1381's current date is outside the valid time period of the tachograph card being inserted. If this date is before July 2005, not even the factory technicians can set the device to the correct date. The DTCO 1381 has detected a general, serious fault in the unit.</p> <p>Action: Check the DTCO 1381's date and correct it using a workshop card and a test device if necessary. If the error message continues to be displayed, replace the DTCO 1381.</p>

Message summaries

056 – Break (slot 1)

DTCO screen display:

```
001 break!  
1004h30 00h15
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <  
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **056** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Working time warning message	<p>Meaning: After a continuous driving time of 4 hours 30 minutes the DTCO 1381 warns the driver to take a prescribed break.</p> <p>Possible cause(s): Legally prescribed minimum break not taken.</p> <p>Action: Look for a place to stop and take the prescribed break.</p>

Message summaries

057 – Break (slot 1)

DTCO screen display:

```
001 break!  
1004h15 000h15
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **057** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description
Working time warning message	<p>Meaning: After a continuous driving time of 4 hours 15 minutes the DTCO 1381 warns the driver to take a prescribed break (slot 1, driver 1).</p> <p>Possible cause(s): Legally prescribed minimum break not taken.</p> <p>Action: Look for a place to stop and take the prescribed break.</p>

Message summaries

058 – Internal fault (slot 2)

DTCO screen display:

```
4A2 internal
fault          58
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **058** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Fault warning message	<p>Meaning: Card mechanical system fault (slot 2, driver 2)</p> <p>Possible cause(s): Card lock not closed General card mechanical system fault</p> <p>Action: Insert the tachograph card again. Request the tachograph card again. Interrupt constant voltage supply (i.e. restart). If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p> <p>Remarks: The inserted tachograph card may be ejected. This fault is reset after a tachograph card has been inserted correctly.</p>	<p>This warning message is displayed every hour until the cause is removed. This warning message is not stored in the mass memory in Calibration mode.</p>

Message summaries

059 – Card fault (slot 2)

DTCO screen display:

```
x02 card fault
                    59
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
<
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **059** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Fault warning message	Meaning: Communication error with inserted tachograph card in slot 2 (driver 2).
-----------------------	--

Possible cause(s):
The tachograph card contacts are soiled.
The workshop card is faulty.
The card slot contacts are soiled.


Action:
Check the tachograph card's contact points.
Check and clean the tachograph card.
Check the DTCO 1381, clean the card slot's contact points if necessary.
Replace any defective components if necessary.

Remarks:
The inserted tachograph card is ejected.


Message summaries

060 – Security breach (slot 2)

DTCO screen display:



Example – CTCII display:

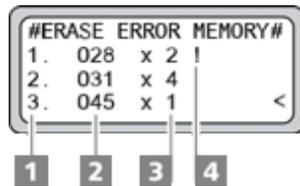

Use the and keys to scroll through the error memory:

- 1 Consecutive number
- 2 Position in error memory
- 3 Number of errors
- 4 Symbol for **error is active**

! **Important**
Stands for error memory code **060** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: The authenticity of the data on the card in slot 2 (driver 2) is not guaranteed.</p> <p>Possible cause(s): Error when checking data authenticity.</p> <p>Action: Check the tachograph card.</p> <p>Remarks: Tachograph card is ejected.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----  
! 0 05.06.2011 07:03  
! 14 ( 0) 00h15  
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
! 0 05.06.2011 08:03  
! 14 ( 0) 00h15  
A 0 /WS SV 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
! 0 05.06.2011 08:03  
! 14 ( 0) 00h15  
@ 00 /DF000012323455 6 8  
-----
```


A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

061 – Security breach (slot 2)

DTCO screen display:



Example – CTCII display:

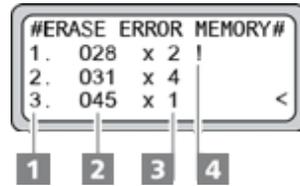

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **061** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Missing card (slot 2, driver 2). The DTCO 1381 no longer detects an inserted card.</p> <p>Possible cause(s): After a power cut, the identity check detects that a previously inserted card is missing or another card has been inserted. A card is inserted and the card mechanical system's locking device is not locked.</p> <p>Action: Check whether the tachograph card is inserted correctly. Eject the tachograph card and insert it again. Check whether the card locking device is functioning correctly. If the error message continues to be displayed, replace the DTCO 1381.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----  
! 0 05.06.2011 07:03  
! 18 ( 0) 00h15  
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
! 0 05.06.2011 08:03  
! 18 ( 0) 00h15  
A D /VS SW 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
! 0 05.06.2011 08:03  
! 18 ( 0) 00h15  
@ 00 /DF000012323455 6 8  
-----
```

A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.


Message summaries

062 – Card not closed (slot 2)

DTCO screen display:



Example – CTCII display:

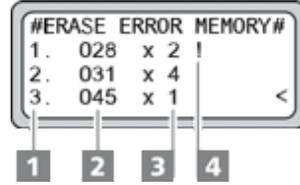

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **062** that can be read out using a CTCII.
No workshop card necessary. ◀


Type of message	Description
-----------------	-------------

Event warning message	<p>Meaning: When reading in a driver or workshop card (in card slot 2), the unit detects that the card was not removed correctly from the last vehicle or the data is not correctly stored.</p> <p>Action: Check the tachograph card. Check the previous EC recording equipment.</p> <p>Remarks: The source of the error is not in the current DTCO 1381.</p>
-----------------------	--


Message summaries

063 – Time overlap (slot 2)

DTCO screen display:



Example – CTCII display:

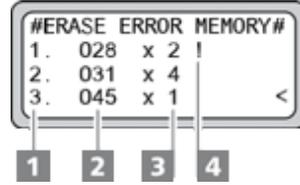

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **063** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message **Meaning:**

Negative time difference between this and the last vehicle (slot 2: driver card) (EC recording equipment).

Possible cause(s):

The removal time stored on the card is later than the current system time (= time the card was inserted into the current DTCO 1381), i.e. the time of the current EC recording equipment is slow compared with the time on the previous EC recording equipment.

Action:

- Check the current DTCO 1381's UTC time and correct it using a test device if necessary.
- Check the UTC time on the previous EC recording equipment. Correct it using a test device if necessary.

Message summaries

064 – Insertion while driving (slot 2)

DTCO screen display:

```
! 02 insertion  
while drivine 64
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **064** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Event warning message	<p>Meaning: A tachograph card has been inserted in slot 2 (driver 2) after the start of the trip.</p> <p>Possible cause(s): Motion sensor pulses detected before the tachograph card was read correctly.</p> <p>Action: Normally only insert tachograph cards when the vehicle is stationary. No further action is necessary.</p>


Message summaries

065 – Security breach (slot 2)

DTCO screen display:



Example – CTCII display:

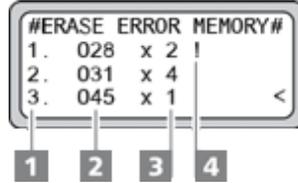

Use the and keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **065** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Security breach warning message	<p>Meaning: Security breach when authenticating a tachograph card in slot 2 (driver 2).</p> <p>Possible cause(s): Error when checking tachograph card identity.</p> <p>Action: Check the tachograph card. Check the workshop card, enter the correct PIN.</p>	This warning message is not stored in the mass memory in Calibration mode.

Printout vehicle > event:



```
-----  
! 0 05.06.2011 07:03  
! 12 ( 0) 00h15  
-----
```

A security breach occurred while no card was inserted.

Printout driver > event:



```
-----  
! 0 05.06.2011 08:03  
! 12 ( 0) 00h15  
A D /VS SW 123  
-----
```

A security breach occurred while no card was inserted.

```
-----  
! 0 05.06.2011 08:03  
! 12 ( 0) 00h15  
@ 00 /DF000012323455 6 8  
-----
```

A security breach occurred while a card was inserted.

Explanation of error information on the printouts:
Please refer to the DTCO 1381 Technical Product Manual.

Message summaries

066 – Card not valid (slot 2)

DTCO screen display:

```
! 02 card not
valid          66
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **066** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description
-----------------	-------------

Event warning message **Meaning:**

The tachograph card inserted in slot 2 (driver 2) has expired or is invalid.

Possible cause(s):

An invalid or expired tachograph card **a)** has been inserted.

When the day changes **b)** the unit detects that an inserted tachograph card is no longer valid.

Action:

Check whether the tachograph card is valid.

Remarks:


a) You can only insert an expired tachograph card (tachograph card has expired but the certificate is still valid) to print out or display the stored data; after confirming the warning message the tachograph card is read as **read only**.

b) If the day changes when the vehicle is stationary, the corresponding data on the tachograph card is stored and the card is ejected. If the day changes during the trip, the corresponding data on the tachograph card is stored when the trip ends and the card is ejected.


Message summaries

067 – Recording inconsistent (slot 2)

DTCO screen display:



Example – CTCII display:

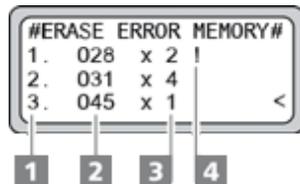

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**

! **Important**
Stands for error memory code **067** that can be read out using a CTCII.
No workshop card necessary.
Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: When reading in a tachograph card inserted in slot 2 (driver 2), the unit detects that there is an inconsistency in the links within the day's data.</p> <p>Action: Check the tachograph card. Analyse data structure.</p>


Message summaries

068 – Card error (slot 2)

DTCO screen display:



Example – CTCII display:

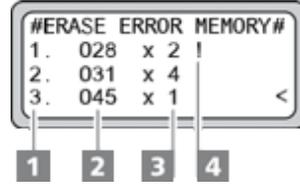

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **068** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message

Description

Operation message

Meaning:

The tachograph card inserted in slot 2 (driver 2) was not detected or cannot be read or written.

Possible cause(s):

- Card inserted incorrectly.
- The tachograph card contacts are soiled.
- Card is faulty.
- The card slot contacts are soiled.

Action:

- Check whether it is a valid tachograph card.
- Check whether the tachograph card has been inserted correctly. If necessary insert it correctly.
- Check the card contacts, clean if necessary.
- Check the tachograph card.
- Check whether another tachograph card can be read correctly.
- Clean the card slot contacts.

Message summaries

069 – Wrong card type (slot 2)

DTCO screen display:

```
069 wrong card
type                69
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **069** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message

Description

Operation message

Meaning:

The card inserted in slot 2 (driver 2) is not a tachograph card.

Possible cause(s):

- The card is not a valid tachograph card.
- The tachograph card contacts are soiled.
- Card is faulty.
- The card slot contacts are soiled.

Action:

- Check whether it is a valid tachograph card.
 - Check whether the tachograph card has been inserted correctly. If necessary insert it correctly.
 - Check the card contacts, clean if necessary.
 - Check the tachograph card.
 - Clean the card slot contacts.
-


Message summaries

070 – Card locked (slot 2)

DTCO screen display:



Example – CTCII display:

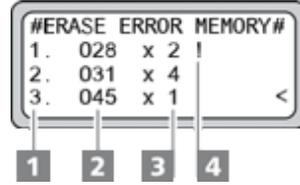

Use the  and  keys to scroll through the error memory:

-  1 Consecutive number
-  2 Position in error memory
-  3 Number of errors
-  4 Symbol for **error is active**



Important

Stands for error memory code **070** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message

Description

Operation message

Meaning:

The workshop card inserted in slot 2 (driver 2) is blocked.

Possible cause(s):

The workshop card is blocked because the PIN has been entered wrongly 5 times.
Workshop card is faulty.

Action:

Check the workshop card.
Insert a valid (not blocked) workshop card.

Message summaries

071 – Internal fault (slot 2)

DTCO screen display:

```
MA internal      71
fault
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
1 2 3 4
```

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **071** that can be read out using a CTCII.

No workshop card necessary.

Operation messages are not stored in the DTCO 1381 mass memory. ◀

Type of message	Description
Operation message	<p>Meaning: Procedure not possible. The tachograph card in slot 2 (driver 2) is not accepted and is ejected again.</p> <p>Possible cause(s): The DTCO 1381's current date is outside the valid time period of the tachograph card being inserted. If this date is before July 2005, not even the factory technicians can set the device to the correct date. The DTCO 1381 has detected a general, serious fault in the unit.</p> <p>Action: Check the DTCO 1381's date and correct it using a workshop card and a test device if necessary. If the error message continues to be displayed, replace the DTCO 1381.</p>

Message summaries

074 – Break (slot 2)

DTCO screen display:

```
074 break!  
1004h30 00h15
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**

! **Important**
Stands for error memory code **074** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Working time warning message	<p>Meaning: After a continuous driving time of 4 hours 30 minutes the DTCO 1381 warns the driver to take a prescribed break.</p> <p>Possible cause(s): Legally prescribed minimum break not taken.</p> <p>Maßnahme(n): Look for a place to stop and take the prescribed break.</p>

Message summaries

075 – Break (slot 2)

DTCO screen display:

```
001 break!  
1004h15 000h15
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#  
1. 028 x 2 !  
2. 031 x 4  
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**


! **Important**
Stands for error memory code **075** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description
Working time warning message	<p>Meaning: After a continuous driving time of 4 hours 15 minutes the DTCO 1381 warns the driver to take a prescribed break (slot 1, driver 1).</p> <p>Possible cause(s): Legally prescribed minimum break not taken.</p> <p>Action: Look for a place to stop and take the prescribed break.</p>

Message summaries

076 - Overspeed (alert)

Example - CTCII display:

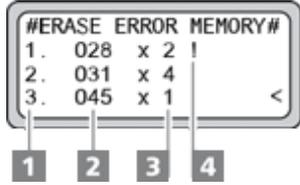

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**.

! **Important**
Stands for error memory code **076** that can be read out using a CTCII.
No workshop card necessary. 

Type of message	Description	Additional information
Event warning message	<p>Meaning: Advance warning of programmed maximum speed (Vset). Advance warning time of a maximum of 59 seconds can be selected (can only be set by the vehicle manufacturer End of line).</p> <p>Possible cause(s): Current speed is higher than Vset.</p> <p>Action: Reduce speed.</p>	<p>Pre-speeding alert: Warns the driver of a speed infringement to avoid the event being recorded. With this message the memory code (MC) is not shown on the DTCO 1381 display.</p>

Message summaries

078 – Upgrade failed error

DTCO screen display:

```
upgrade failed
error #00000003
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **078** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning: The upgrade file is faulty or corrupted; the software upgrade has been cancelled.</p> <p>Action: Check the upgrade file. Repeat the software upgrade with an intact upgrade file.</p> <p>Remarks: The DTCO 1381 is not the cause of this message.</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

078 – Upgrade failed error

DTCO screen display:

```
Upgrade failed
error #FFFFFFE
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **078** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning: The integrity of the software upgrade module or that of a security key is not guaranteed; the software upgrade has been cancelled.</p> <p>Action: Check the DTCO 1381. Repeat the software upgrade. If the error message continues to be displayed in spite of taking the above action, replace the DTCO 1381.</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

079 – Upgrade failed error

DTCO screen display:

```
upgrade failed
error #00000002
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **079** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning:</p> <p>The management device could not be authenticated; the software upgrade has been cancelled.</p> <p>Action:</p> <p>Check that the management device is working properly. Repeat the software upgrade.</p> <p>Remarks:</p> <p>The DTCO 1381 is not necessarily the cause of this message.</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

079 – Upgrade failed error

DTCO screen display:

```
upgrade failed
error #00000001
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **079** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning:</p> <p>During the software upgrade the DTCO 1381's power supply was outside the specified range; the software upgrade has been cancelled.</p> <p>Action:</p> <p>Check the DTCO 1381's power supply and if necessary correct:</p> <ul style="list-style-type: none">Connection plug and cable (connector assignment, bad connection, loose contact).Is the voltage value on terminals 30 and 15 within the specified range? <p>During the software upgrade ensure that the DTCO 1381 has a secure power source, e.g. a laboratory power pack.</p> <p>Repeat the software upgrade.</p> <p>If the error message continues to be displayed, replace the DTCO 1381.</p> <p>Remarks:</p> <p>The DTCO 1381 is not necessarily the cause of this message.</p>	<p>With this message the memory code (MC) is not shown on the DTCO 1381 display.</p>

Message summaries

079 – Upgrade failed error

DTCO screen display:

```
upgrade failed
error #00000004
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **079** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning:</p> <p>Communication error; the software upgrade has been cancelled.</p> <p>Possible cause(s):</p> <ul style="list-style-type: none">DTCO 1381 download interface defectiveData connection interrupted or data cable defectiveManagement device interface disturbed or blocked <p>Action:</p> <ul style="list-style-type: none">Check the download interface on the DTCO 1381.Check data connection and data cable.Check the Management Device's interface and that the MD itself is working properly.Repeat the software upgrade. <p>Remarks:</p> <p>The DTCO 1381 is not necessarily the cause of this message.</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

079 – Upgrade failed error

DTCO screen display:

```
Upgrade failed
error #FFFFFFF
```

Example – CTCII display:

```
#ERASE ERROR MEMORY#
1. 028 x 2 !
2. 031 x 4
3. 045 x 1 <
```

1 2 3 4

Use the  and  keys to scroll through the error memory:

- 1** Consecutive number
- 2** Position in error memory
- 3** Number of errors
- 4** Symbol for **error is active**



Important

Stands for error memory code **079** that can be read out using a CTCII.

No workshop card necessary. ◀

Type of message	Description	Additional information
Other event warning message	<p>Meaning:</p> <p>The software upgrade module could not be started; the software upgrade has been cancelled.</p> <p>Possible cause(s):</p> <p>Internal fault of the DTCO 1381.</p> <p>Action:</p> <p>Check the DTCO 1381. Repeat the software upgrade. If the error message continues to be displayed, replace the DTCO 1381.</p>	<p>With this message the memory code (MC) is not shown on the DTCO 1381 display.</p>


Message summaries

080 – Motion conflict

DTCO screen display:



Example – CTCII display:

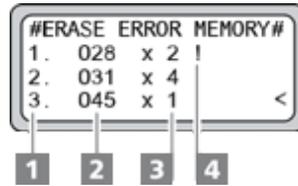

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**

 **Important**
Stands for error memory code **080** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional information
Event message	<p>Meaning:</p> <p>Vehicle motion evaluation conflict between the sensor and an external signal source</p> <p>Possible cause(s):</p> <p>The IMS function is missing or the IMS configuration (Independent Motion Signal) is not programmed correctly. An operational error may have occurred when loading onto the train or ferry.</p> <p>The KITAS2+ 2171 is defective, the sensor cable is interrupted or disturbed.</p> <p>Action:</p> <p>Check the KITAS2+ 2171 sensor cable. Check the KITAS2+ 2171. Check the IMS function. Check the IMS configuration (Independent Motion Signal). Test the connection line between the DTCO1381 and the vehicle data bus (CAN). Replace the defective component (if necessary).</p>	<p>These warning messages are displayed every hour until the cause is removed.</p>


Message summaries

081 – IMS fault

DTCO screen display:



Example – CTCII display:

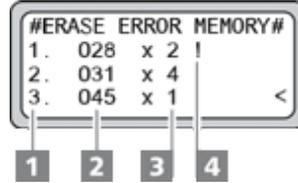

Use the  and  keys to scroll through the error memory:

-  Consecutive number
-  Position in error memory
-  Number of errors
-  Symbol for **error is active**

! **Important**
Stands for error memory code **081** that can be read out using a CTCII.
No workshop card necessary. ◀

Type of message	Description	Additional Information
Fault message	<p>Meaning:</p> <p>The additional, independent motion signal is missing or not available.</p> <p>Possible cause(s) :</p> <p>CAN bus medium malfunction.</p> <p>Action:</p> <p>Check the IMS function. Test the BUS medium, if necessary using a CAN analysis tool. Test the connection line between the DTCO1381 and the vehicle data bus (CAN). Check the CAN subscriber power supply (T. 30, 15 and 31).</p> <p>Remarks:</p> <p>The DTCO1381 does not have to be the cause of the error. Example: The vehicle is in an area where GPS signal cannot be received (GPS malfunction).</p>	<p>These warning messages are displayed every hour until the cause is removed. These warning messages are not stored in the mass memory in "Calibration" mode.</p>

Message summaries

DTCO 1381 screen displays (1 to 26)

Click on a screen display to open the page with the corresponding error code description.



Important

The following warning messages lead to an entry in the mass memory; they also appear on a DTCO printout:

- Event warning messages
- Security breach messages
- Fault warning messages.

The following messages are neither printed out nor saved in the mass memory:

- Working time warning message
- Operation warning message
- Other event and fault warning messages. ◀

<code>xA internal fault 01</code>	<code>xΛ sensor fault 16</code>
<code>xA internal fault 02</code>	<code>!⊕ security breach 17</code>
<code>xA internal fault 04</code>	<code>!⊕ security breach 18</code>
<code>xA internal fault 05</code>	<code>!‡ power interruption 19</code>
<code>xA time fault 06</code>	<code>xΛ sensor fault 20</code>
<code>xA calibration fault 09</code>	<code>xΛ sensor fault 21</code>
<code>xA internal fault 10</code>	<code>xΛ sensor fault 22</code>
<code>x‡ download fault 12</code>	<code>!⊕ security breach 23</code>
<code>xA internal fault 13</code>	<code>!⊕ security breach 24</code>
<code>xA internal fault 14</code>	<code>!⊕ security breach 25</code>
<code>xA internal fault 15</code>	<code>!⊕ security breach 26</code>

Message summaries

DTCO 1381 screen displays (28 to 49)

Click on a screen display to open the page with the corresponding error code description.



Important

The following warning messages lead to an entry in the mass memory; they also appear on a DTCO printout:

- Event warning messages
- Security breach messages
- Fault warning messages.

The following messages are neither printed out nor saved in the mass memory:

- Working time warning message
- Operation warning message
- Other event and fault warning messages. ◀

```
!0 driving  
without card 28
```

```
xA1 internal  
fault 40
```

```
! cards  
conflict 29
```

```
x1 card fault  
41
```

```
>> overspeed  
30
```

```
!1 security  
breach 42
```

```
! power  
interruption 31
```

```
!1 security  
breach 43
```

```
! ejection not  
possible 34
```

```
!A1 card not  
closed 44
```

```
! printout not  
possible 36
```

```
!01 insertion  
while driving 46
```

```
! printout  
delayed 37
```

```
!1 security  
breach 47
```

```
! drawer open  
38
```

```
!1 card not  
valid 48
```

```
! no paper  
39
```

```
!?1 recording  
inconsistent 49
```

Message summaries

DTCO 1381 screen displays (50 to 81)

Click on a screen display to open the page with the corresponding error code description.



Important

The following warning messages lead to an entry in the mass memory; they also appear on a DTCO printout:

- Event warning messages
- Security breach messages
- Fault warning messages.

The following messages are neither printed out nor saved in the mass memory:

- Working time warning message
- Operation warning message
- Other event and fault warning messages. ◀

401 card error 50	!02 insertion while drivins 64
401 wrong card type 51	!02 security breach 65
40x1 card locked 52	!02 card not valid 66
4A internal fault 53	40?2 recording inconsistent 67
4A2 internal fault 58	402 card error 68
x02 card fault 59	402 wrong card type 69
!02 security breach 60	40x2 card locked 70
!02 security breach 61	4A internal fault 71
!0A2 card not closed 62	!A1 motion conflict 80
!002 time overlap 63	xA1 IMS fault 81

Message summaries

DTCO 1381 screen displays (without error code)

Click on a screen display to open the page with the corresponding error code description.



Important

The following warning messages lead to an entry in the mass memory; they also appear on a DTCO printout:

- Event warning messages
- Security breach messages
- Fault warning messages

The following messages are neither printed out nor saved in the mass memory.

- Working time warning message
- Operation warning message
- Other event and fault warning messages. ◀

```
!o1 break!  
1o04h30  #00h15
```

056¹⁾/ 074²⁾

```
upgrade failed  
error #00000001
```

079¹⁾

```
!o1 break!  
1o04h15  #00h15
```

057¹⁾/ 075²⁾

```
upgrade failed  
error #00000002
```

079¹⁾

```
upgrade failed  
error #FFFFFFFE
```

078¹⁾

```
upgrade failed  
error #00000004
```

079¹⁾

```
upgrade failed  
error #00000003
```

078¹⁾

```
upgrade failed  
error #FFFFFFFF
```

079¹⁾

```
!o1 expires in  
days 28
```

```
!o wrong entry
```

```
!AS calibration  
in days 28
```

```
!v please  
enter
```

¹⁾ v alert; error memory code

²⁾ Slot 2 fault; error memory code

Message summaries

Please enter

DTCO screen display:


```
⏏ please  
enter
```

Type of message	Description	Additional information
Operation message	<p>Meaning: If no entry is made during an entry procedure, this prompt will be displayed after 30 seconds.</p> <p>Action: Continue entering data.</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

Wrong entry

DTCO screen display:



```
10 wrong entry
```

Type of message	Description	Additional information
Operation message	Meaning: A wrong PIN has been entered for the workshop card. Action: Repeat PIN entry or cancel the procedure.	With this message the memory code (MC) is not shown on the DTCO 1381 display.

Message summaries

Expires in days

DTCO screen display:

```
001 expires in
days          28
```


```
002 expires in
days          28
```

Type of message	Description	Additional information
Operation message	<p>Meaning:</p> <p>The card in question will become invalid, e.g. in 28 days.</p> <p>Action:</p> <p>Apply for a new card before your old one expires.</p> <p>Remarks:</p> <p>The monitoring of this message depends on the DTCO 1381's configuration.</p> <p>The monitoring of this message can be activated or deactivated.</p> <p>The advance warning time (0 – 92 days) of this message is configurable.</p>	<p>With this message the memory code (MC) is not shown on the DTCO 1381 display.</p>

Message summaries

Calibration in days

DTCO screen display:



OAS calibration
in days 28

Type of message	Description	Additional information
Operation message	<p>Meaning: The next periodic inspection is due, e.g. in 28 days.</p> <p>Action: Ensure that the legally prescribed periodic inspection is carried out in an authorised workshop in e.g. 28 days at the latest.</p> <p>Remarks: The monitoring of this message depends on the DTCO 1381's configuration.</p> <p>The monitoring of this message can be activated or deactivated. The advance warning time (0 – 92 days) of this message is configurable (WarnBeforeExpiryDate).</p>	With this message the memory code (MC) is not shown on the DTCO 1381 display.
